

TRCW-90SFEG0 Waveguide-Coax Adapter, X-band

Features:

- Return Loss: 20 dB min
- Broadband
- WR-90 to SMA(F) inEnd-Launch Configuration




Electrical Specifications:

- Frequency: 8.2- 12.4 GHz
- Insertion Loss: 0.2 dB
- Return Loss: 20 dB min

Mechanical Specifications:

- Waveguide: WR-90, WG16/R100
- Coax: SMA (F)
- Size: 1.63" x 1.63" x 0.75"
- Material: Aluminum
- Finish: Chromate

Outline: TRCW014-OL00

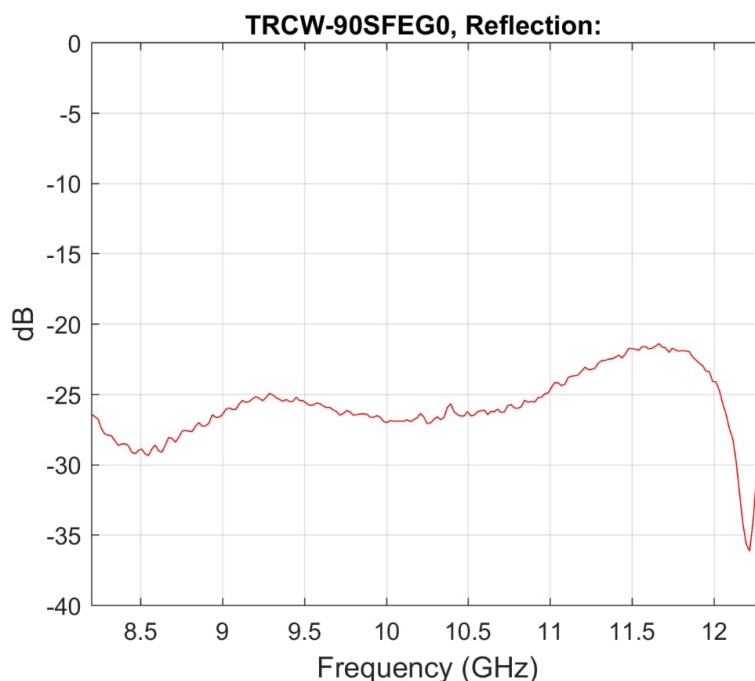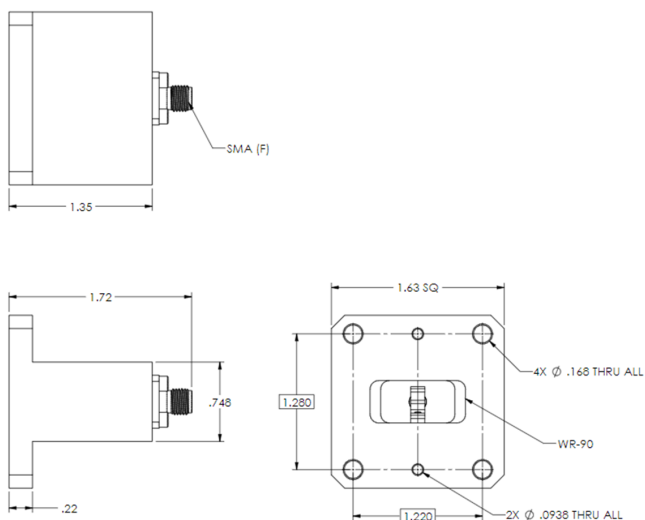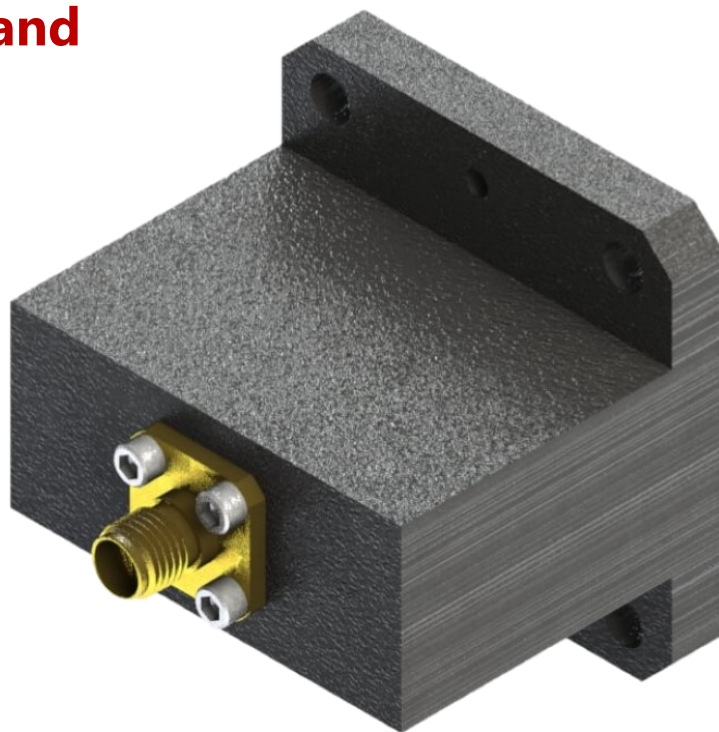

Note: Raytech Inc. reserves the right to change the information presented without notice.