

ANSO-F0Q0S0

Orthomode Transducer, 33.0 – 53.0 GHz

Features


- Compact Design
- Low Loss
- Ultra Broadband Coverage
- High Power Handling



Specification

Frequency	33.0 – 53.0 GHz
Return Loss	15 dB
Port Isolation	60 dB
Ports	V- & H-Port: WR-22, UG-599/U (Square) Or UG-383/U (Round)
Common Ports	□ .219", UG-383/U
Size	1.70" X 1.13" x 1.13"
Material	Aluminum, Gold Plating (Contact Raytech for other available material)

Typical Test Data

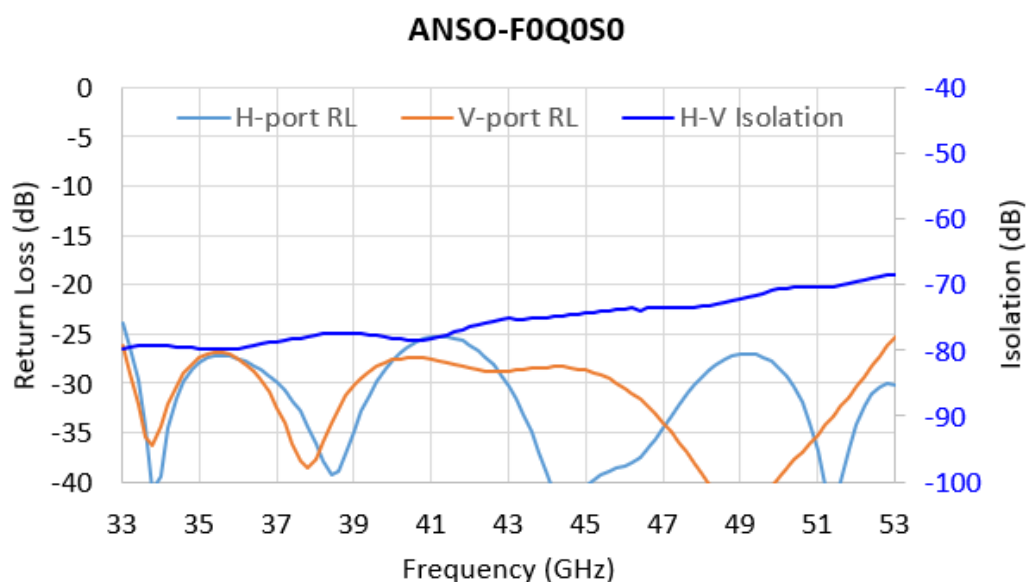

Outline Drawing

