

TRCW-198FRC0 (Female) & TRCW-198MRC0 (Male) WAVEGUIDE-COAX ADAPTER, U-band

Features:

- Return Loss: 15 dB min
- Broadband
- WR-19 to 1.85 mm in Right Angle Configuration

Electrical Specifications:

- Frequency: 40.0-60.0 GHz
- Insertion Loss: 0.3 dB
- Return Loss: 15 dB min.


Mechanical Specifications:

- Waveguide: WR - 19, UG-383/U
- Coax: 1.85 mm
- Size: 1.125" (dia.) x 0.70" (Length)
- Material: Aluminum
- Finish: Hard Gold




Typical Test Data:


TRCW-198F(M)RC0, Reflection:

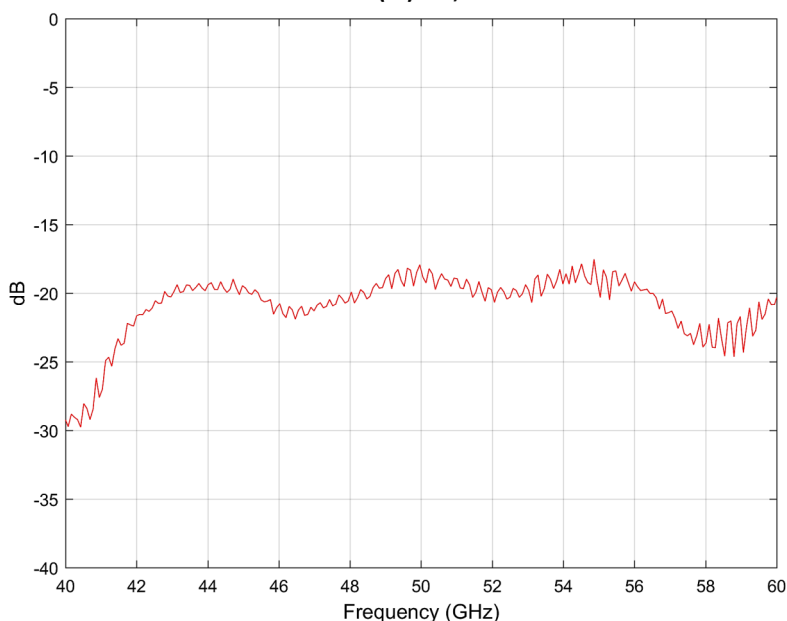

Outline Drawing:

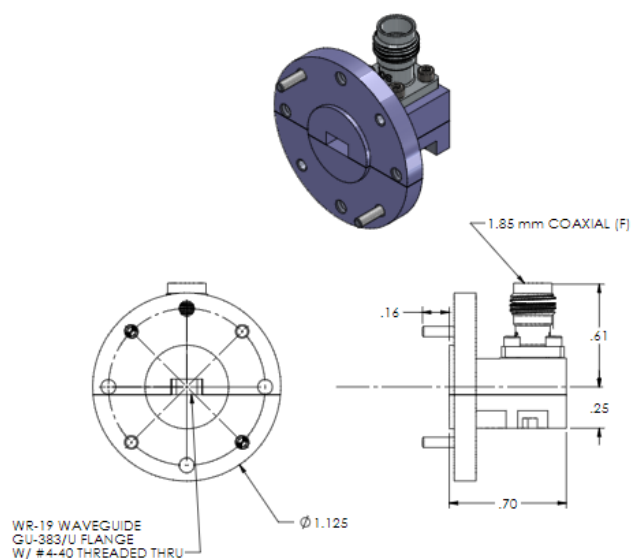

MODEL #: TRCW-198FRC0

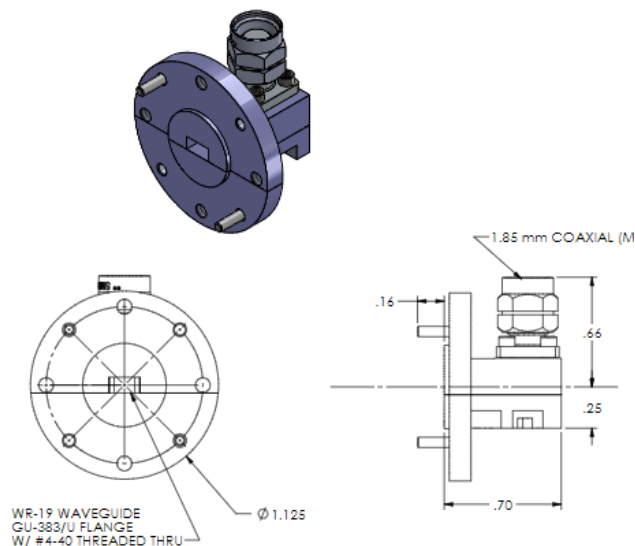

MODEL #: TRCW-198MRC0