


ANSO-CKU001

Orthomode Transducer, 14 GHz

Features


- Compact Design
- Low Loss
- High Isolation
- High Power Handling

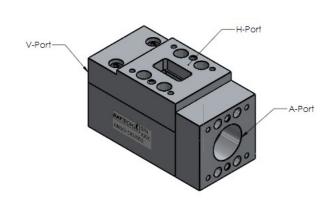

Specification

Frequency	13.5 – 14.5 GHz
Insertion Loss	0.3 dB (V-port) / 0.2 dB (H-port)
Return Loss	18 dB min
Port Isolation	40 dB min
Ports	WR-75
Size	1.50" X 1.70" x 3.00"
Material	Aluminum , Chromate

Typical Test Data

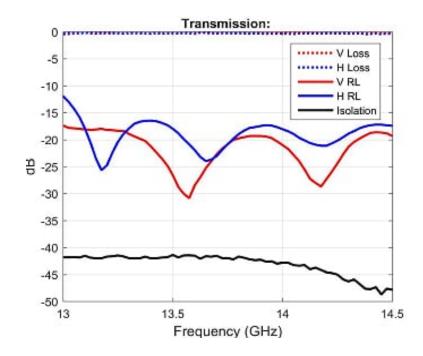



Outline Drawing

