


ANSO-46KAS0

Orthomode Transducer, 17-21 & 27-31 GHz

Features


- Compact Design
- Low Loss
- High Isolation (Built-in Highpass & Lowpass Filter)
- High Power Handling

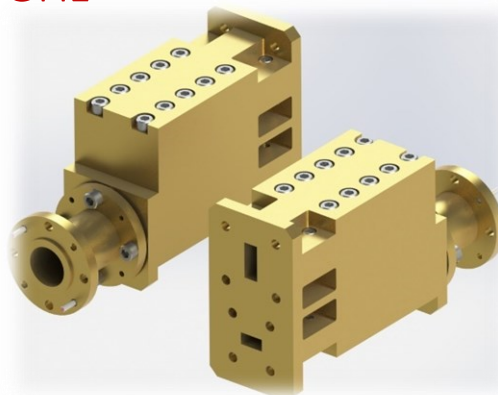

Specification

Frequency	17 - 21 & 27 - 31 GHz
Return Loss	15 dB
Port Isolation	80 dB min
Ports	WR-28, UG-599/U (V-port), WR-42, UG-595/U (H-port)
Common Ports	Φ .455", UG-425/U
Size	3.60" X 1.13" x 2.06"
Material	Aluminum , Gold Plating

Typical Test Data

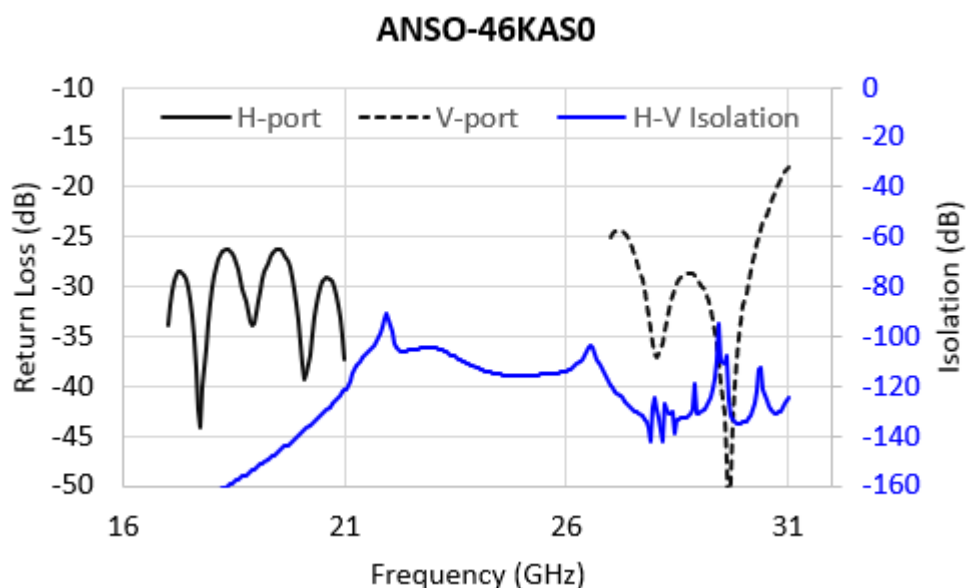

Outline Drawing

