


ANHS-KU15 Series

Scalar Horn (H), 15 dBi Gain

Features


- Beam Symmetry
- Low Sidelobe Level

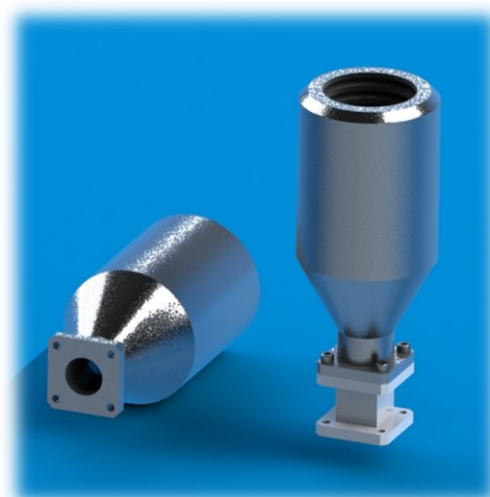

Electrical Specification

Frequency	12.4 – 18.0 GHz		
Gain	15.0 dBi		
Beamwidth	34.0 degrees (Beam Symmetry)		
Polarization	Linear		
Sidelobe Level	25 dB		
XPD	25 dB		
Input Ports	KU15OX – 0.688" diameter Circular Waveguide KU15RX – WR-62 KU15CRX – Coax (Right-angle), KU15CEX – Coax (End-launch) X = Company Reserve		
Flange	UG-419/U, Square		

Electrical Specification

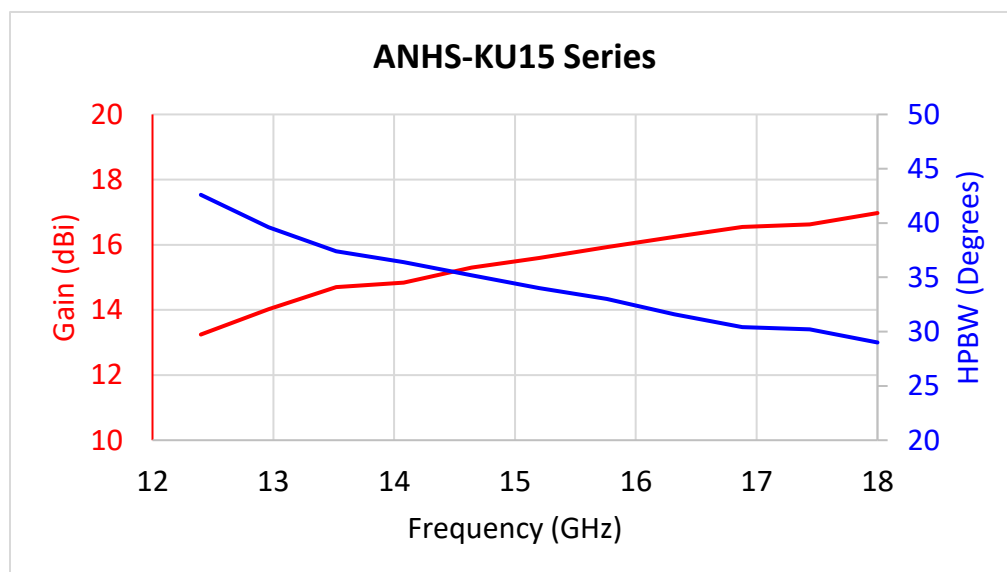

Radiation Pattern

