


ANRC-P06A0DL0

Reflector Antenna, 6.0", Ka-band

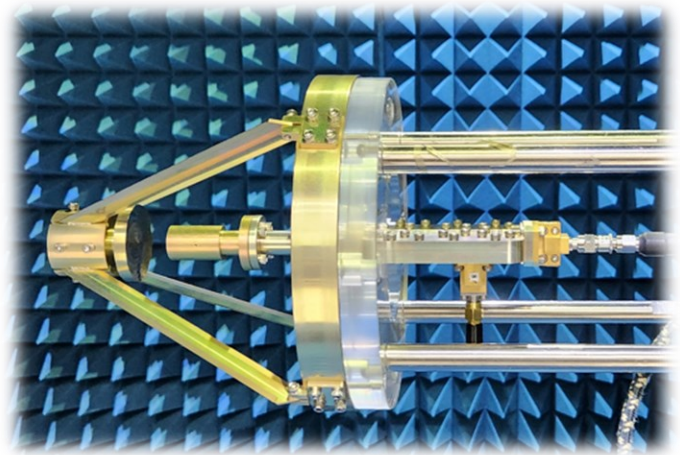


Features

- Full Ka-band Coverage
- Displaced-axis Sub-Reflector for Maximum Gain
- Horn Cover for Outdoor Use







Electrical Specification

Frequency	26.0 – 40.0 GHz
Gain	31 dBi
Beamwidth	3.5 x 3.5 deg
Polarization	Linear
Ports Isolation	40 dB
Input Ports	WR-28, UG-599/U

Typical Test Data

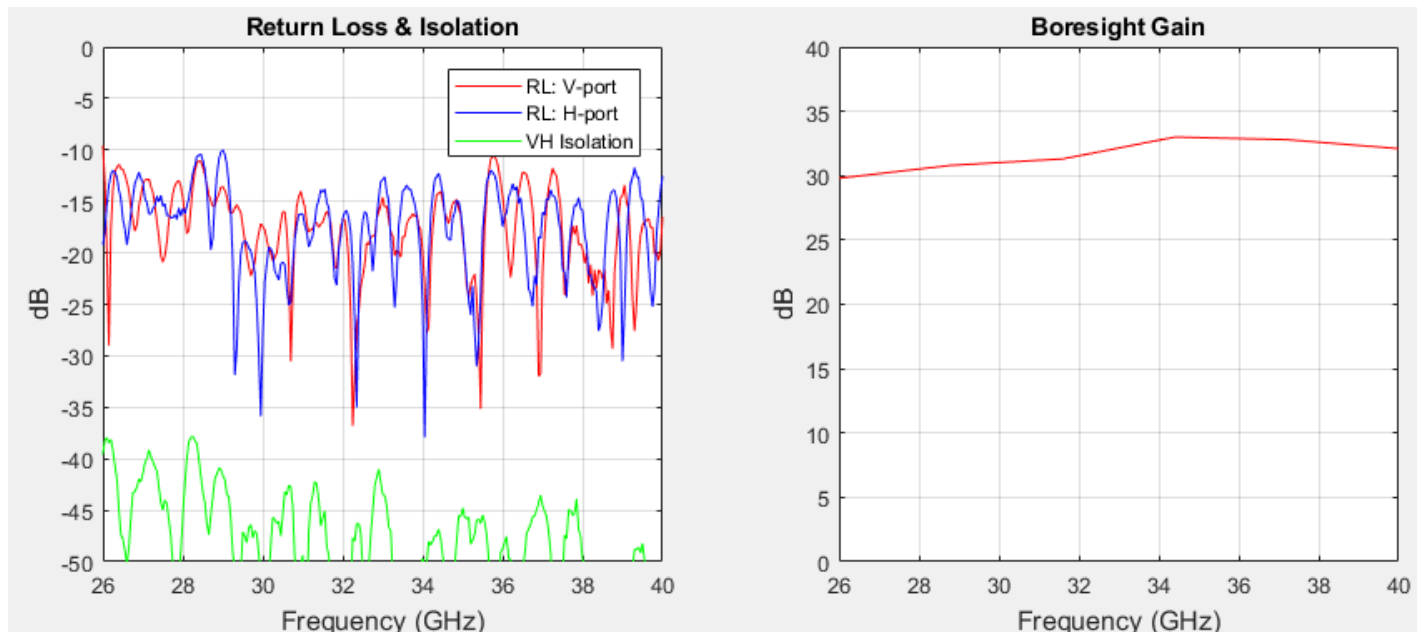

Radiation Pattern

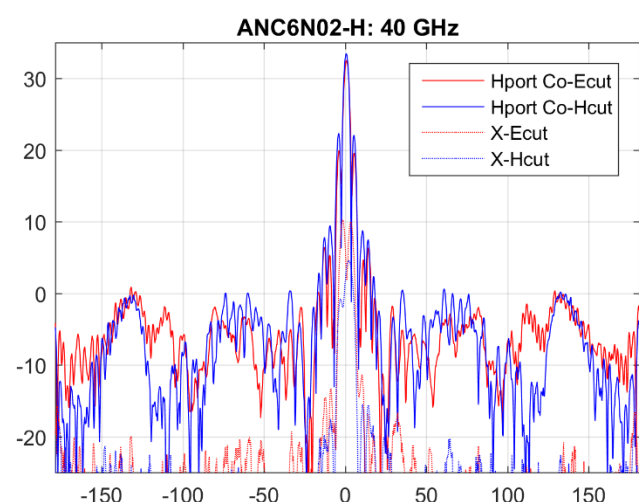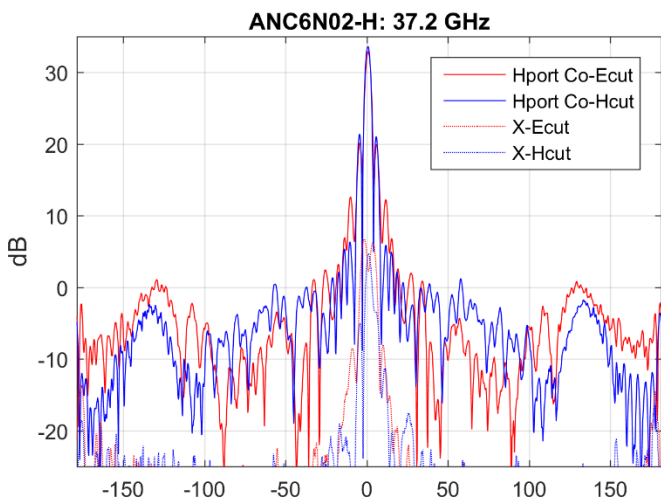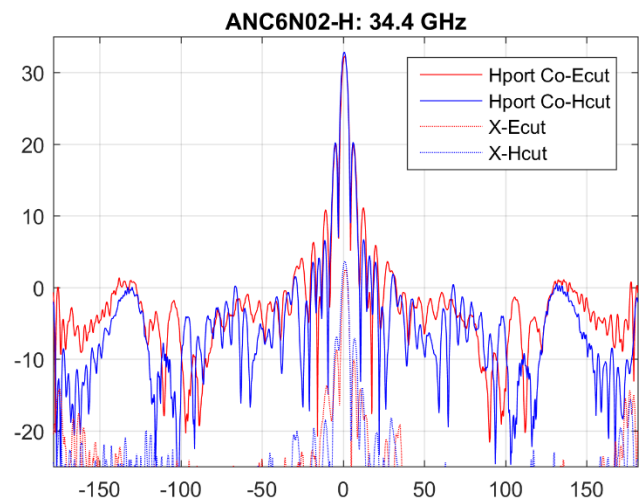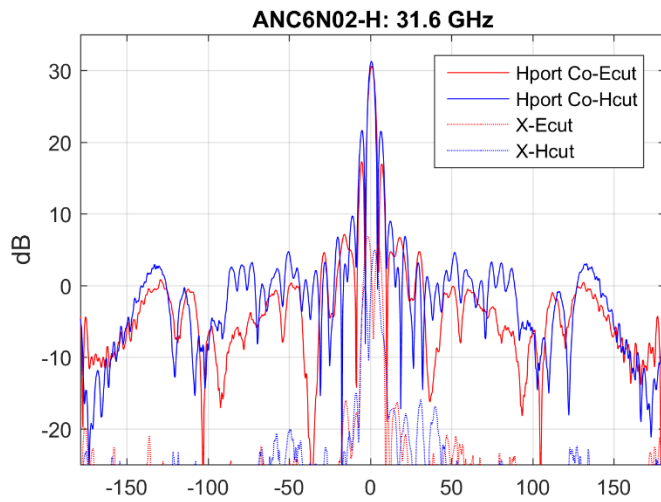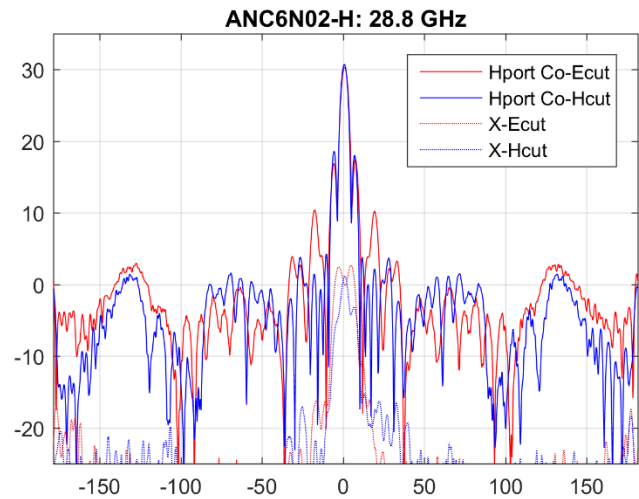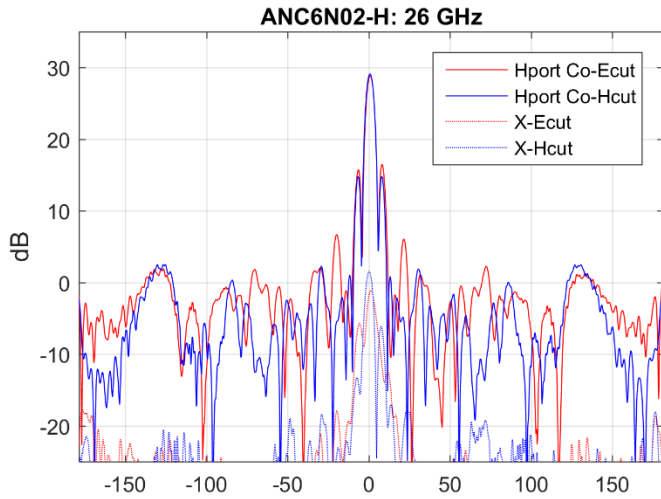

Outline Drawing

