

COXD-KA30WC0


Crossguide Coupler, 30 dB

Features


- Compact Sizes
- Full waveguide band
- Low VSWR / High Directivity

Specification

- Frequency: 26.5 – 40.0 GHz
- Insertion Loss: 0.2 dB Max
- VSWR (In & Out): 1.1:1 max
- VSWR (Couple, Coax): 1.5:1 max
- Coupling: 30 dB
- Coupling Variation: + / - 1.5 dB
- Directivity: 15 dB min
- Port (In & Out): WR-28, UG-599/U
- Port (Couple): 2.92 mm (F)

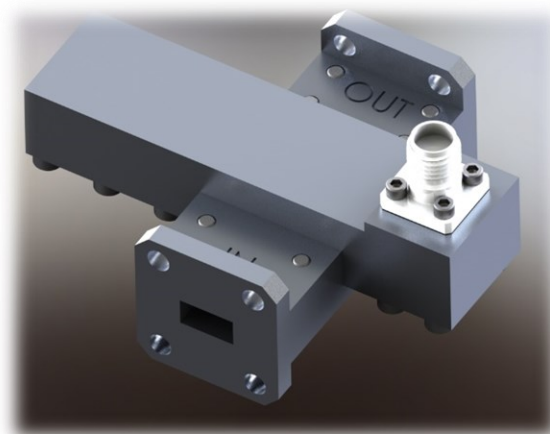

Outline Drawing

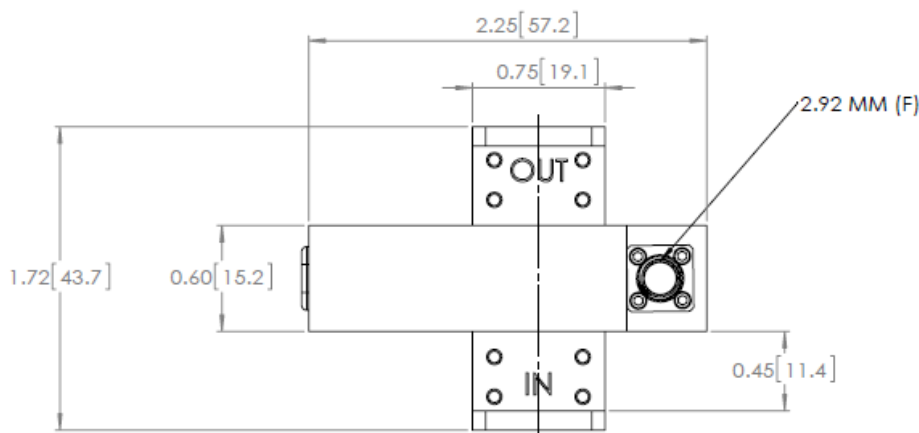

Typical Test Data

COXD-KA30WC0

