


FIDX-2028W00


Diplexer, 17.2-23.55 & 25.25-31 GHz

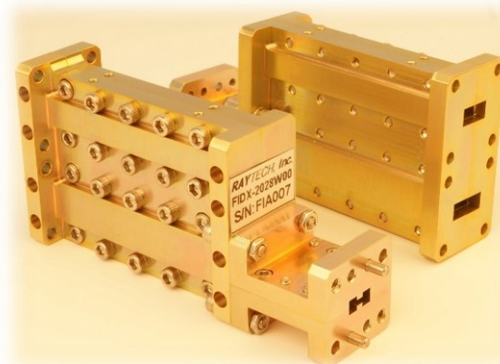

Electrical Specification

Ports	L-port	H-port	GHz
Passband	17.2-23.55	22.25-31.0	GHz
Insertion Loss	0.7	0.7	dB
Rejection	50 at H-Port	50 at L-Port	dB
VSWR	1.7:1	1.7:1	
Ports	WR-42, UG-595/U	WR-34, UG-1530	
Size	0.88" x 1.78" x 3.50"		

Typical Test Data

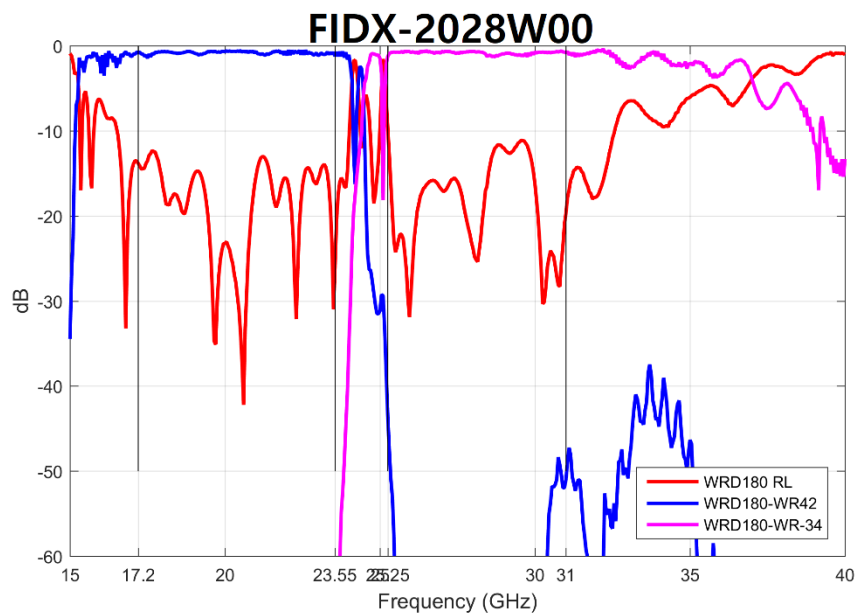

Outline Drawing: FIDX-7286E00

