

TRWJ-S1522C0

Waveguide Transition, WR-22 to WR-15


Features

- Low VSWR
- Compact Sizes (Length = 0.17")
- Broad Bandwidths



Electrical / Mechanical Specifications

- Operating Frequency: 43 – 52 GHz
- Return Loss: 15 dB
- Insertion Loss: < 0.1 dB
- WR-22, UG-383/U to WR-15, UG-385/U

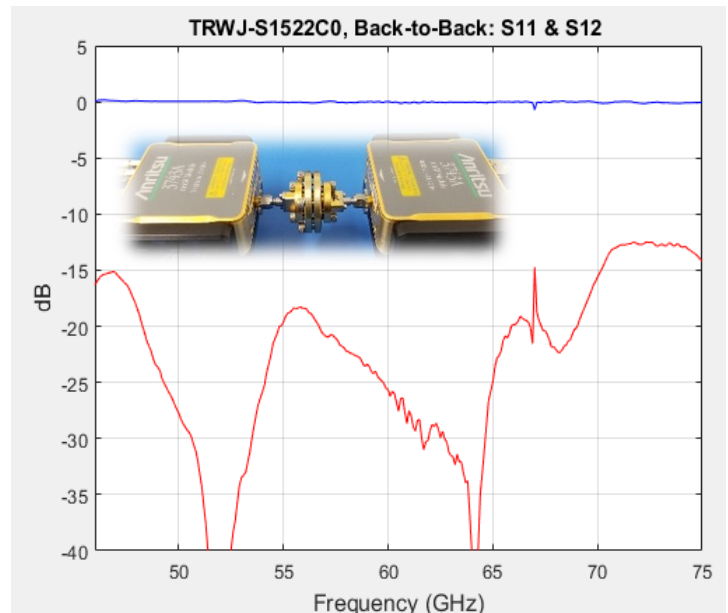

Test Data / Outline Drawing

